

# SWIFT

## 1.5 GL



## 1.3 GA



## Colours



Prl. Supreme Red 2



Met. Garnet Orange



Prme. Kashmir Blue



Met. Silky Silver



Prme. Azure Gray



Prl. Bluish Black 3



Prl. White



Met. Lavender

# Equipment list

S: Standard  
O: Optional  
-: Not available

Engine		Petrol	
		1.3L	1.5L
Grade		GA	GL
Transmission		5MT/4AT	
Steering		LHD/RHD	
Number of doors		5	
Seating capacity		5	
<b>COMFORT</b>			
Power steering		S	S
Tilt steering		S	S
Electric windows (front & rear)		S	S
Central door locking		S	S
Remote controlled door locks with hazard lamp answerback function		O	S
Manual air conditioning		S	S
Heater		S	S
Pollen filter		S	S
Audio	Antenna	S	S
	4 speakers	O	S
	2 tweeters + CD tuner + steering wheel audio switches	*1	O
<b>INSTRUMENT PANEL</b>			
Tachometer		S	S
Digital clock		S	-
Information display	Digital clock		
	Outside temperature gauge	-	S
	Fuel consumption gauge		
Light-off / key reminder		S	S
Driver's seat belt warning lamp		S	S
Door ajar warning lamp		S	S
Fuel warning indicator		S	S
3-spoke steering wheel	Urethane	S	S
	Leather covered	*1	O
<b>INTERIOR</b>			
Cabin light (3-position)		S	S
Luggage area light (2-position)		-	S
Cup holders (front/2 / rear:1)		S	S
Sun visors (both sides)		S	S
Vanity mirrors (both sides)		-	S
Ticket holders (both sides)		-	S
Centre console box		S	S
Day / night rearview mirror		S	S
Convenience hook (on passenger's seat back)		-	S
Material of front & rear seats		Fabric	Fabric
Front seat height adjuster (driver's side)		-	S
60:40 split tumble folding rear seat		S	S
2 rear seat head restraints		S	S
3 assist grips		-	S
Cloth accented door trims		S	S
Front door trim pockets		S	S
Front seatback pocket (passenger's side)		-	S
Front seat undertray (passenger's side)		-	S
12V accessory socket (on centre console)		S	S
Cigarette lighter & removable ashtray		*2	O
Rear luggage shelf		O	S
Black metallic painted door trim garnish		-	S
Chrome plated interior	Inside door opener		
	Side louver bezel	-	S
	Release button on the parking brake lever		
Medium silver painted shifting hole bezel		-	S
Remote fuel lid opener		S	S
Footrest (except for RHD:MT)		S	S
<b>EXTERIOR</b>			
Halogen headlights		S	S
Muffler extension		-	S
Electrically adjustable outside mirrors		S	S
Coloured outside door mirror cowls		-	S
Coloured outside door handles		-	S
Electromagnetic tailgate opener		S	S
2-speed + variable intermittent windscreen wipers		S	S
Rear window intermittent wiper & washer		S	S
Rear window demister		S	S
UV cut glass windows (front doors)		S	S
Front fog lamps		O	O
Black coloured A & B pillars		S	S
Tyres & wheels	165/70R14 + steel wheels (full wheel caps)	S	-
	185/60R15 + steel wheels (full wheel caps)	-	S
	185/60R15 + alloy wheels	O	O
<b>SAFETY &amp; SECURITY</b>			
SRS front dual airbags		S	S
Head impact protection structure		S	S
Shift lock & key interlock (AT only)		S	S
ABS with EBD		S	S
Brake assist		S	S
Foot protection design for brake & clutch pedals		S	S
Seat belts Front	3-point ELR with pre-tensioner, force limiter & height adjuster	S	S
	Rear 3-point ELR x 2, centre 2-point x 1		
High mounted stop lamp		S	S
ISO FIX child seat anchorages		S	S
Child seat tether anchorages		S	S
Child-proof rear door locks		S	S
Immobiliser		S	S
Side impact beams		S	S

Equipments and option availability may vary for individual markets.


\*1: 2 tweeters + CD tuner + steering wheel audio switches and leather covered steering wheel are set option.  
\*2: 12V accessory socket is replaced by cigarette lighter.

# Specifications

		5-door			
		Petrol			
		1.3L		1.5L VVT	
		4X2			
		LHD/RHD	RHD	LHD/RHD	RHD
<b>DIMENSIONS</b>					
Overall length	mm	3,695			
Overall width	mm	1,690			
Overall height	mm	1,510			
Wheelbase	mm	2,390			
Tread	Front	1,470			
	Rear	1,480			
Ground clearance	mm	145			
Minimum turning radius	m	4.7			
Luggage capacity	Rear seat folded (VDA method)	litres			
	Rear seat raised (VDA method)	litres			
<b>ENGINE</b>					
Type		M13A	M15A		
Number of cylinders		4	4		
Number of valves		16	16		
Piston displacement	cm <sup>3</sup>	1,328	1,490		
Bore x stroke	mm	78.0 x 69.5	78.0 x 78.0		
Compression ratio		9.5	9.5		
Maximum output	kW/rpm	67/6,000	74/6,000		
Maximum torque	Nm/rpm	114/4,000	133/4,000		
Fuel distribution		Multipoint injection	Multipoint injection		
<b>TRANSMISSION</b>					
Type		5MT	4AT	5MT	4AT
Gear ratio	1st	3.454	2.875	3.545	2.875
	2nd	1.904	1.568	1.904	1.568
	3rd	1.280	1.000	1.310	1.000
	4th	0.966	0.697	0.969	0.697
	5th	0.757	-	0.769	-
	Reverse	3.272	2.300	3.250	2.300
Final gear ratio		4.105	4.144	4.105	4.144
<b>CHASSIS</b>					
Steering		Rack & Pinion			
Brakes	Front	Ventilated disc			
	Rear	Drum, leading & trailing			
Suspensions	Front	MacPherson strut & coil spring			
	Rear	Torsion beam & coil spring			
Tyres		165/70R14, 185/60R15		185/60R15	
<b>WEIGHTS</b>					
Curb weight (min.)/(with full option)	kg	970/1,030	990/1,050	980/1,040	1,000/1,060
Gross vehicle weight	kg	1,470			
<b>PERFORMANCE</b>					
Maximum speed	km/h	170	165	175	170
0-100 km/h	secs	11.0	12.5	10.0	11.7
<b>CAPACITIES</b>					
Seating capacity	persons	5			
Fuel tank capacity	litres	43			

Specifications may vary for individual markets.

5-door

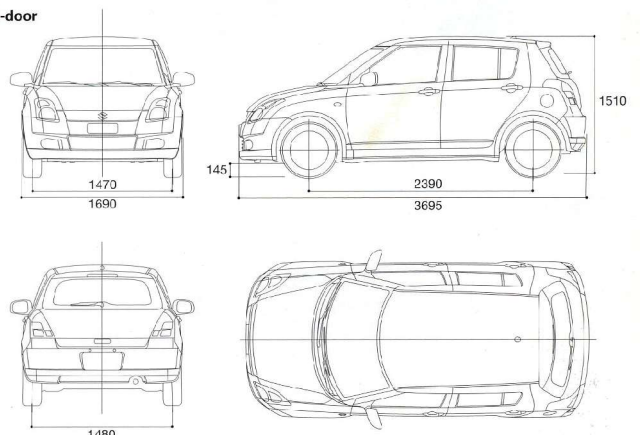

Dimensions (mm)



**SUZUKI**  
SWIFT (Japan) SPEC SHEET